

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 walls - stepped base following the ground, GF + FF to the wall plate and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slabs, floor, steels, roofs, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

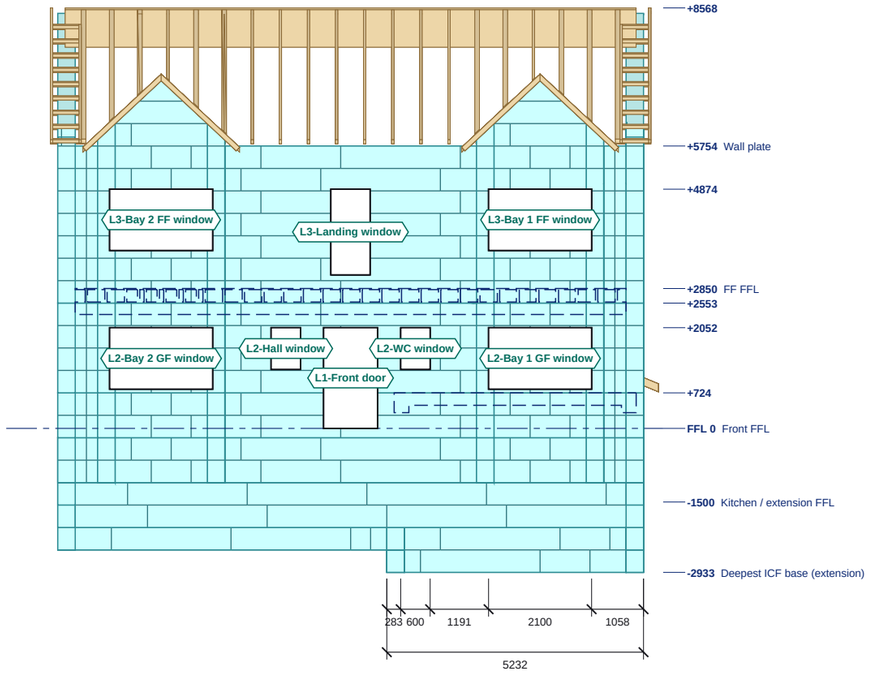

FRONT (ROAD) ELEVATION

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

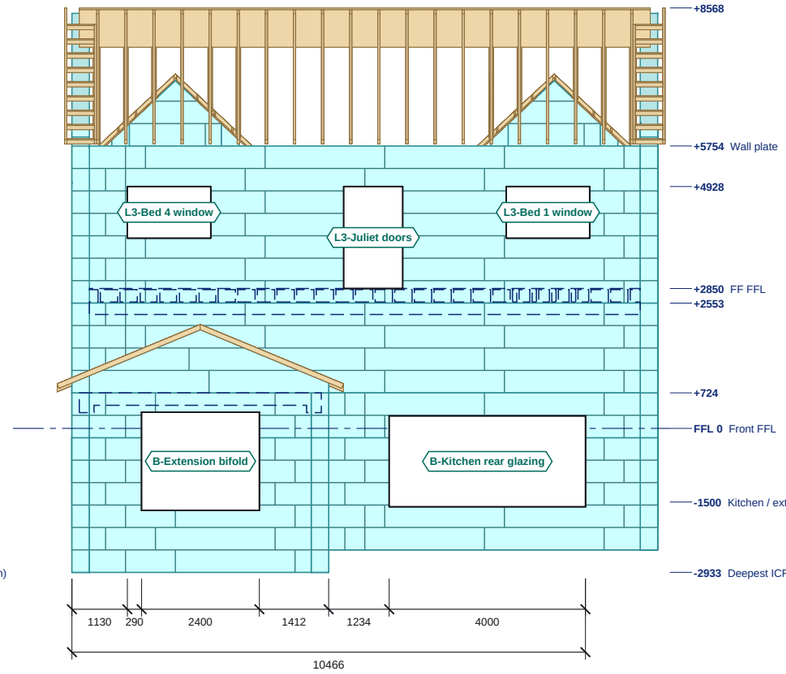

REAR ELEVATION (EXTENSION GLAZED GABLE)

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5m

ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

FRONT (ROAD) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-Front door	1100	2052	0	+2052	-
L2-Bay 1 GF window	2100	1252	+800	+2052	-
L2-Bay 2 GF window	2100	1252	+800	+2052	-
L2-WC window	600	850	+1202	+2052	-
L2-Hall window	600	850	+1202	+2052	-
L3-Bay 1 FF window	2100	1249	+3625	+4874	-
L3-Bay 2 FF window	2100	1249	+3625	+4874	-
L3-Landing window	800	1746	+3128	+4874	-

Structural openings in the ICF; sill and head above GF FFL.

REAR ELEVATION (EXTENSION GLAZED GABLE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
B-Extension bifold	2400	2000	-1670	+330	-
B-Kitchen rear glazing	4000	1848	-1596	+252	-
L3-Bed 4 window	1700	1050	+3877	+4927	-
L3-Juliet doors	1200	2075	+2852	+4927	-
L3-Bed 1 window	1700	1050	+3877	+4927	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
Deepest ICF base (extension)	-2933
Kitchen / extension FFL	-1500
Front FFL	0
top of ICF	+724
top of ICF	+2052
top of ICF	+2553
FF FFL	+2850
top of ICF	+4874
top of ICF	+4928
Wall plate	+5754
top of roof build-up	+8568

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-TBC-HR-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = front FFL. Kitchen-diner / extension FFL -1,500 (split level). FF FFL 2,850, wall plate 5,754.
6. From planning drawings 67SA2-12a / 67SA2-13 (no sections, no levels): levels and the ground line scaled from the 1:100 elevations - to be confirmed by a topo survey and the engineer.
7. The ICF base follows the falling ground 2 courses (914) below finished ground, stepping in whole courses.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	67 Hendrefoilan Road, Sketty, Swansea SA2 9LU - Mr S Sparks

DRAWING TITLE

NORTH AND SOUTH ELEVATIONS - VERSION B (NUDURA BOND, NO STACK JOINTS)

SCALE	SIZE	DATE
1:125	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-TBC-HR-EL-01B	-