

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 walls - stepped base following the ground, GF + FF to the wall plate and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slabs, floor, steels, roofs, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

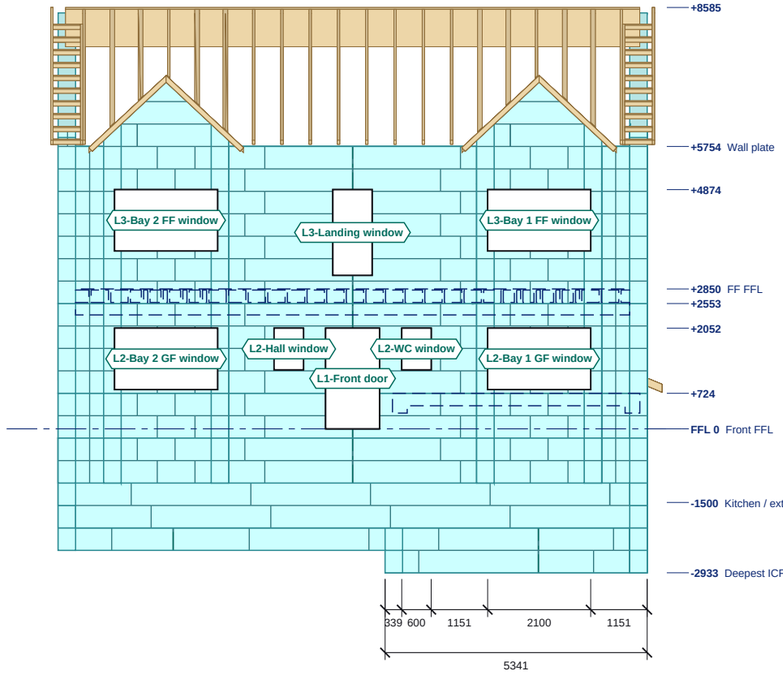

FRONT (ROAD) ELEVATION

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

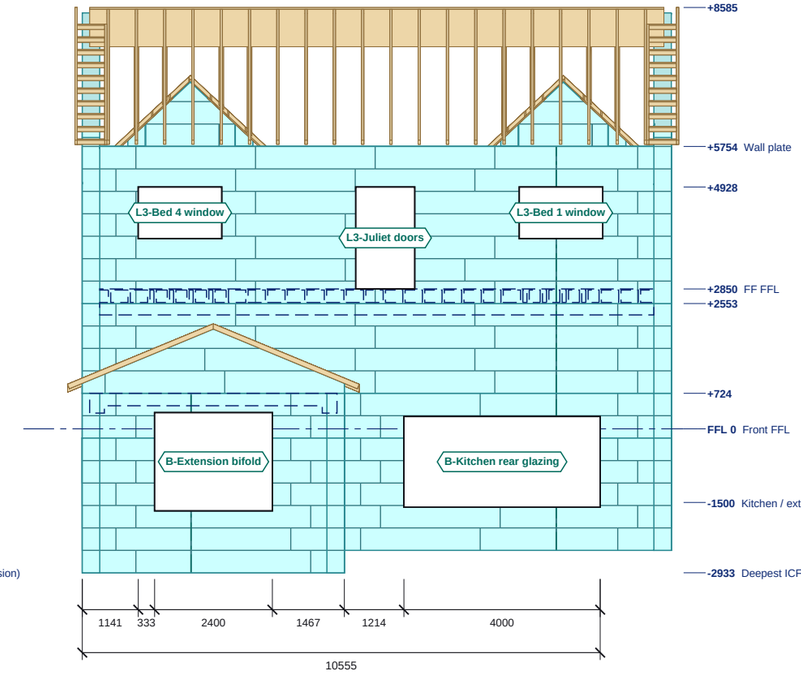

REAR ELEVATION (EXTENSION GLAZED GABLE)

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5m

ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

FRONT (ROAD) ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-Front door	1100	2052	0	+2052	-
L2-Bay 1 GF window	2100	1252	+800	+2052	-
L2-Bay 2 GF window	2100	1252	+800	+2052	-
L2-WC window	600	850	+1202	+2052	-
L2-Hall window	600	850	+1202	+2052	-
L3-Bay 1 FF window	2100	1249	+3625	+4874	-
L3-Bay 2 FF window	2100	1249	+3625	+4874	-
L3-Landing window	800	1746	+3128	+4874	-

Structural openings in the ICF; sill and head above GF FFL.

REAR ELEVATION (EXTENSION GLAZED GABLE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
B-Extension bifold	2400	2000	-1670	+330	-
B-Kitchen rear glazing	4000	1848	-1596	+252	-
L3-Bed 4 window	1700	1050	+3877	+4927	-
L3-Juliet doors	1200	2075	+2852	+4927	-
L3-Bed 1 window	1700	1050	+3877	+4927	-

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL
Deepest ICF base (extension)	-2933
Kitchen / extension FFL	-1500
Front FFL	0
top of ICF	+724
top of ICF	+2052
top of ICF	+2553
FF FFL	+2850
top of ICF	+4874
top of ICF	+4928
Wall plate	+5754
top of roof build-up	+8585

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-089-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = front FFL. Kitchen-diner / extension FFL -1,500 (split level). FF FFL 2,850, wall plate 5,754.
6. From planning drawings 67SA2-12a / 67SA2-13 (no sections, no levels): levels and the ground line scaled from the 1:100 elevations - to be confirmed by a topo survey and the engineer.
7. The ICF base follows the falling ground 2 courses (914) below finished ground, stepping in whole courses.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	67 Hendrefoilan Road, Sketty, Swansea SA2 9LU - Mr S Sparks

DRAWING TITLE

NORTH AND SOUTH ELEVATIONS - VERSION A (AS DRAWN)

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:125	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-089-EL-01A	-