

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 walls - stepped base following the ground, GF + FF to the wall plate and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slabs, floor, steels, roofs, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

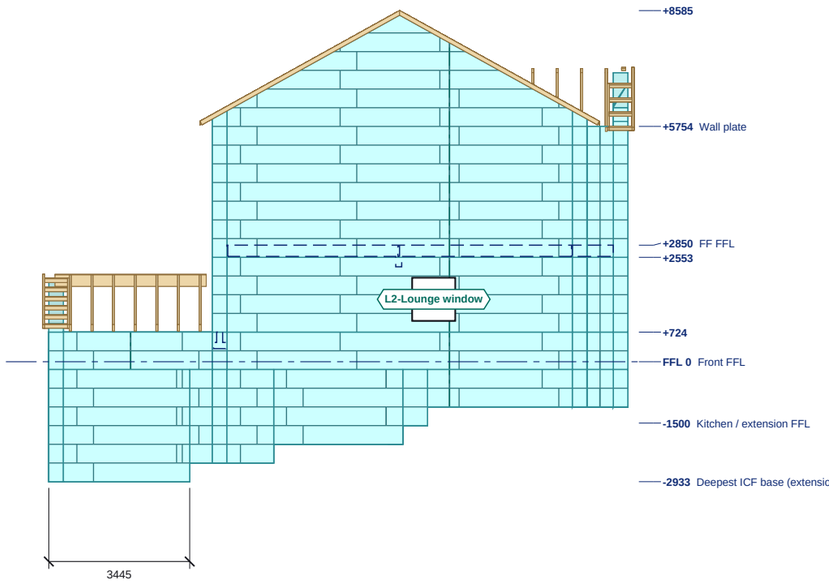


EAST ELEVATION (STEPPED BASE)

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule

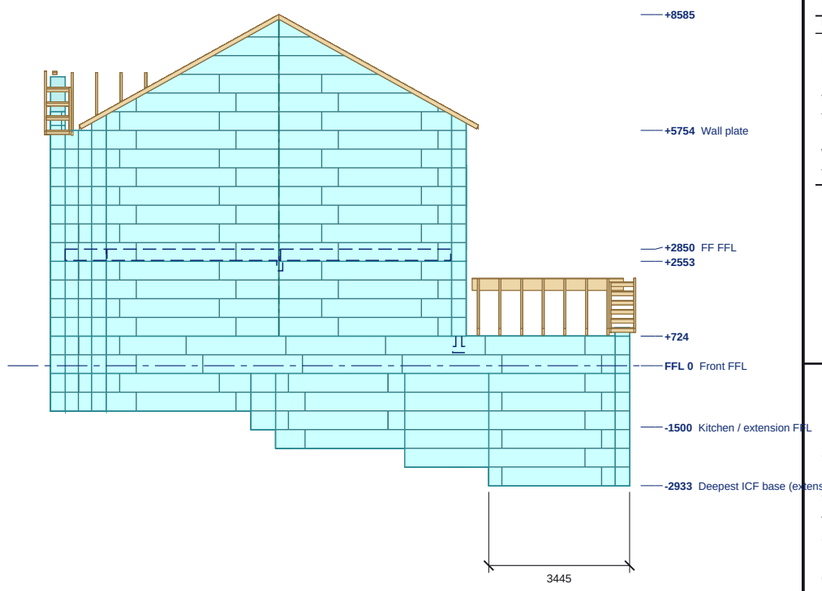

WEST ELEVATION (STEPPED BASE + EXTENSION)

Scale 1:150 @ A3 | Levels above GF FFL; sills and heads in the schedule



ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION (STEPPED BASE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L2-Lounge window	1050	1051	+1001	+2052	-

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION (STEPPED BASE + EXTENSION): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION (STEPPED BASE): LEVELS

Level	FFL
Deepest ICF base (extension)	-2933
Kitchen / extension FFL	-1500
Front FFL	0
top of ICF	+724
top of ICF	+2553
FF FFL	+2850
Wall plate	+5754
top of roof build-up	+8585

WEST ELEVATION (STEPPED BASE + EXTENSION): LEVELS

Level	FFL
Deepest ICF base (extension)	-2933
Kitchen / extension FFL	-1500
Front FFL	0
top of ICF	+724
top of ICF	+2553
FF FFL	+2850
Wall plate	+5754
top of roof build-up	+8585

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-089-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = front FFL. Kitchen-diner / extension FFL -1,500 (split level). FF FFL 2,850, wall plate 5,754.
6. From planning drawings 67SA2-12a / 67SA2-13 (no sections, no levels): levels and the ground line scaled from the 1:100 elevations - to be confirmed by a topo survey and the engineer.
7. The ICF base follows the falling ground 2 courses (914) below finished ground, stepping in whole courses.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	67 Hendrefoilan Road, Sketty, Swansea SA2 9LU - Mr S Sparks

DRAWING TITLE

EAST AND WEST ELEVATIONS - VERSION A (AS DRAWN)

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-089-EL-02A	-