
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 walls - stepped base following the ground, GF + FF to the wall plate and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slabs, floor, steels, roofs, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

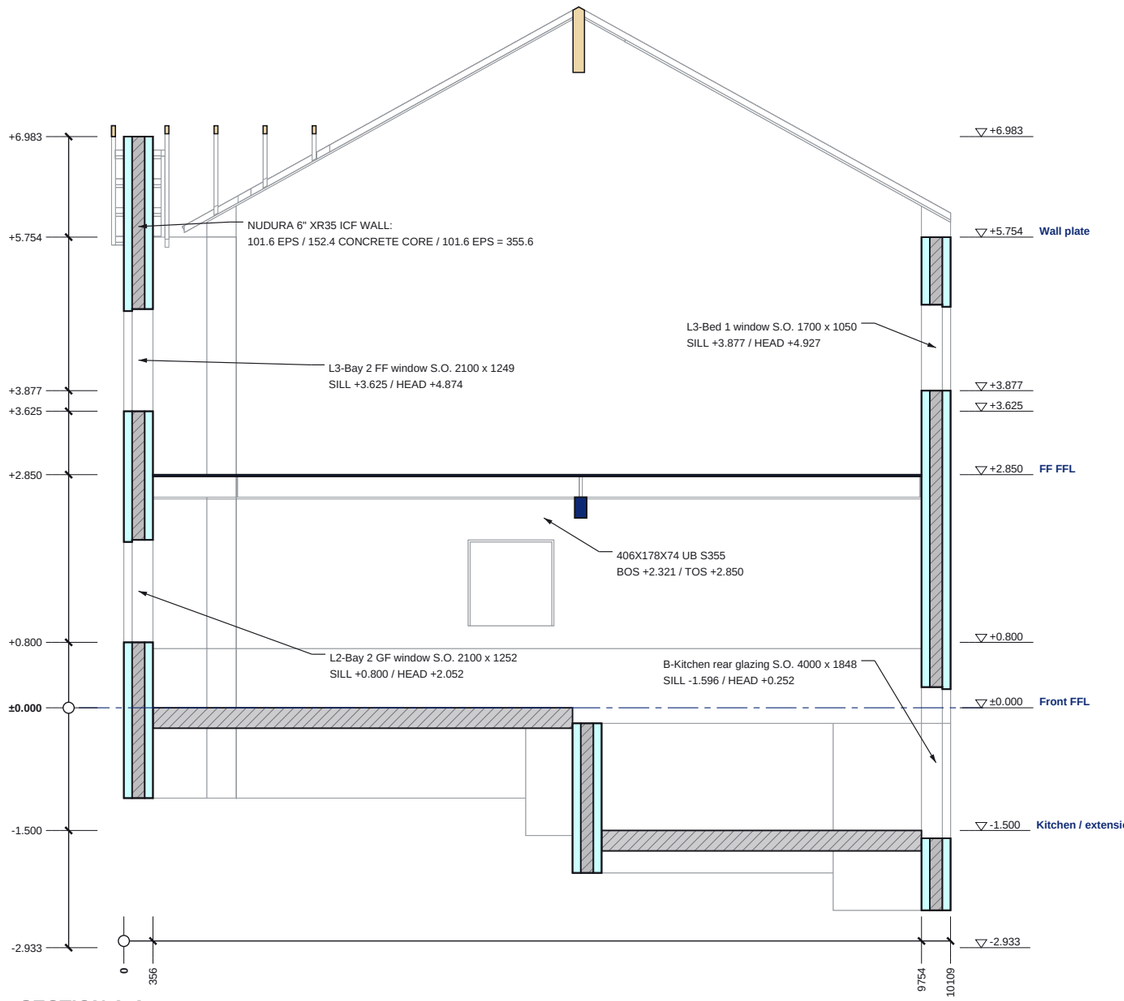

SECTION A-A

Scale 1:75 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Timber (cut)
Beyond the cut (line work)

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL
underside of ICF	-2.933
Kitchen / extension FFL	-1.500
Front FFL	±0.000
top of ICF W19	+0.800
FF FFL	+2.850
top of ICF W19	+3.625
top of ICF W04	+3.877
Wall plate	+5.754
top of ICF W19	+6.983

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
-	406x178x74 UB S355	+2.321	+2.850

SECTION KEY

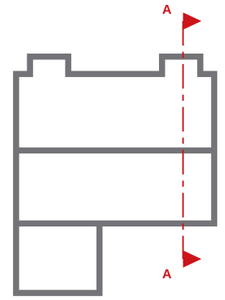

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6, 152.4 core + 101.6 EPS = 355.6. No structural design issued. 6in XR35 (152 core) walls from the planning drawings; the stepped base and the step-line wall retain up to ~1.8 m of fill - retaining design, reinforcement, lintels, the steels and the mix for the engineer.
4. Steel marks, BOS / TOS: rev -. See ES26-089-GA-01 / EL-01 / EL-02 in the approval drawings pack.
5. Datum: 0 = front FFL. Kitchen-diner / extension FFL -1,500 (split level). FF FFL 2,850, wall plate 5,754.
6. From planning drawings 67SA2-12a / 67SA2-13 (no sections, no levels): levels and the ground line scaled from the 1:100 elevations - to be confirmed by a topo survey and the engineer.
7. The ICF base follows the falling ground 2 courses (914) below finished ground, stepping in whole courses.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	67 Hendrefoilan Road, Sketty, Swansea SA2 9LU - Mr S Sparks

DRAWING TITLE

SECTION A-A THROUGH THE STEPPED BASE - VERSION B (NUDURA BOND, NO STACK JOINTS)

SCALE	SIZE	DATE
1:75	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-089-SE-01B	-