
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6in XR35 walls - stepped base following the ground, GF + FF to the wall plate and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slabs, floor, steels, roofs, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

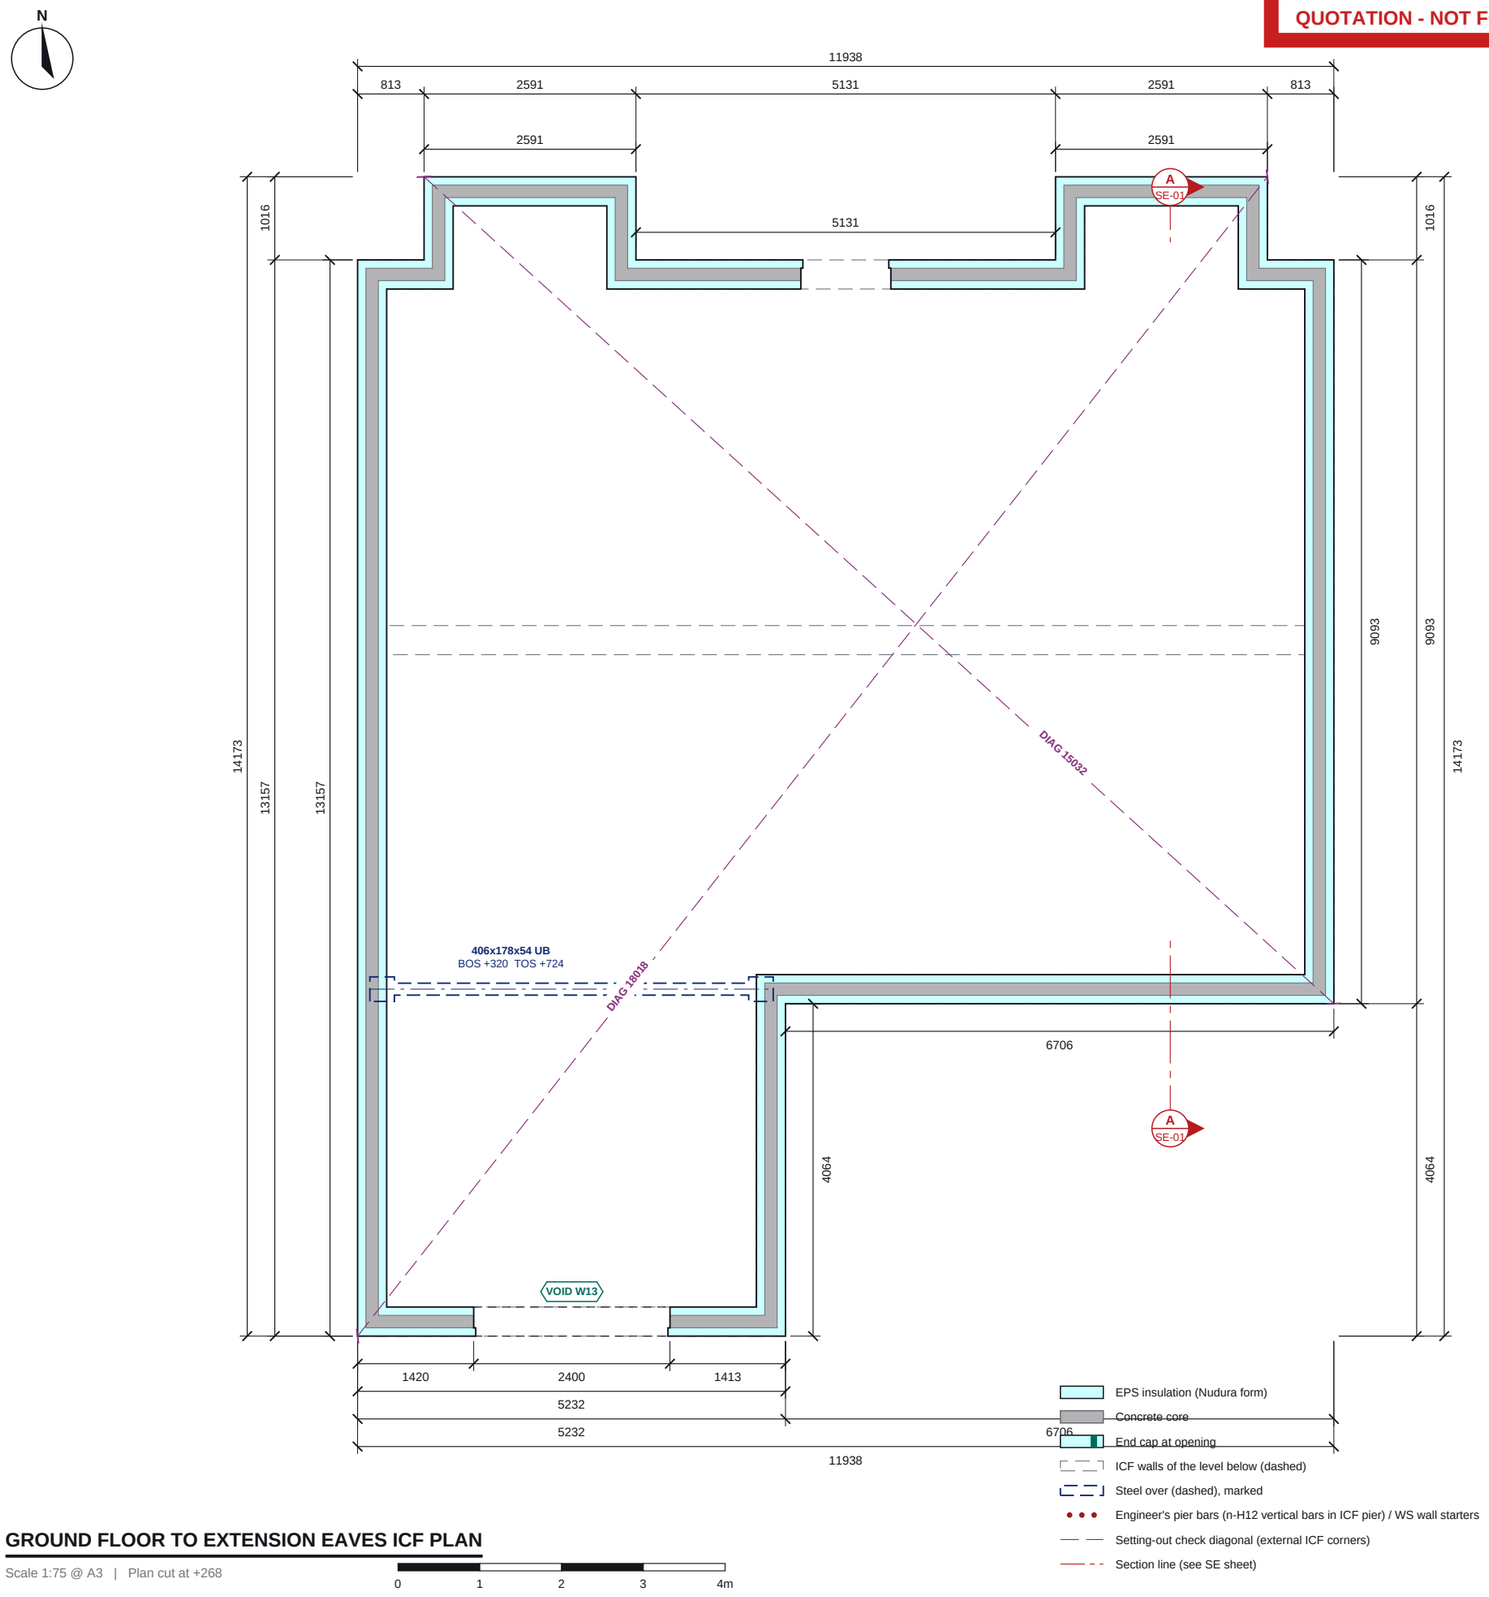

GROUND FLOOR TO EXTENSION EAVES ICF PLAN

Scale 1:75 @ A3 | Plan cut at +268

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

GROUND FLOOR TO EXTENSION EAVES ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
VOID W13	2400	520	-190	+330	-

Structural openings in the ICF; sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	406x178x54 UB S355	+320	+724

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6in XR35 (152 core) walls from the planning drawings; the stepped base and the step-line wall retain up to ~1.8 m of fill - retaining design, reinforcement, lintels, the steels and the mix for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = front FFL. Kitchen-diner / extension FFL -1,500 (split level). FF FFL 2,850, wall plate 5,754.
8. From planning drawings 67SA2-12a / 67SA2-13 (no sections, no levels): levels and the ground line scaled from the 1:100 elevations - to be confirmed by a topo survey and the engineer.
9. The ICF base follows the falling ground 2 courses (914) below finished ground, stepping in whole courses.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor) - Tim Evans	67 Hendrefoilan Road, Sketty, Swansea SA2 9LU - Mr S Sparks

DRAWING TITLE

GROUND FLOOR TO EXTENSION EAVES ICF GENERAL ARRANGEMENT - VERSION B (NUDURA BOND, NO STACK

SCALE	SIZE	DATE
1:75	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-TBC-HR-GA-02B	-